

KR-1/RM-1

Auto Kerato-Refractometer
Auto Refractometer



Fully Automated Easy-to-Use Kerato-Refractometer/ Refractometer



Overview



**Automated
Kerato-Refractometer/
Refractometer**



**Rotary Prism
Technology**



Full 360° Rotating Monitor
Allows Operator to
Maintain Distance from Patient



Small Footprint.
Space Saving



Patient Friendly



Easy to Use

KR-1/RM-1

The Topcon KR-1/RM-1 is a modern, automated, easy-to-use kerato-refractometer/refractometer. Controlled from the color touchscreen and incorporating Topcon's Rotary Prism technology.



Automatic Workflow



Simple Operation

Simply touch the center of the pupil on the touchscreen control panel, and the KR-1/RM-1 automatically captures right then left eye information. The KR-1/RM-1 provides an innovative operator experience.



Touch the pupil image on the screen for auto-alignment



Automatic capture and R/L movement



Data displayed with option to transfer and/or print

Easy-to-Use Color Touchscreen Control Panel

All operating procedures can be performed with the touchscreen control panel. The optimized user interface provides an intuitive operator experience. The KR-1/RM-1 rapidly captures data from the right eye before moving automatically to capture the left eye. An easy-to-use manual capture option is also available, featuring manual focus coupled with auto-alignment.

	ID		Cataract		Settings
	Right Eye		Fixation Target		Left Eye
	Chinrest Up/Down		FOG		Move device forward and backward
	Measuring Mode		Data list/ Target image		Start*
			Print		Auto/ Manual
			Corneal Diameter		
			All Clear		

*Pressing the 'Start' button results in immediate data capture, which may be necessary for less cooperative patients, or patients with significant corneal disease, that can make auto-alignment and focusing difficult.



Flexible and Space Saving Layout

The control panel can be rotated in any direction. The compact device enables the operator to support the patient easily during measurement, even if the patient's eyelid needs to be lifted. These unique aspects will contribute to space saving and flexible layout in your eye examination room.




Operation from
the front
(Seating)



Operation from
the front
(Standing)




Operation from
the side

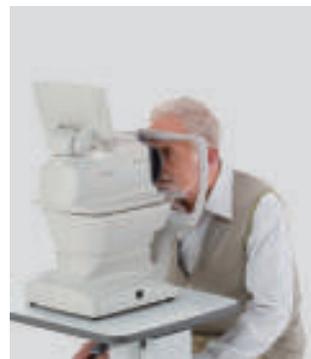

Operation from
the patient's side

Peripheral KRT*


The KR-1 allows the operator to capture 8 peripheral corneal curvature measurements in addition to the central data. *KR-1 only.

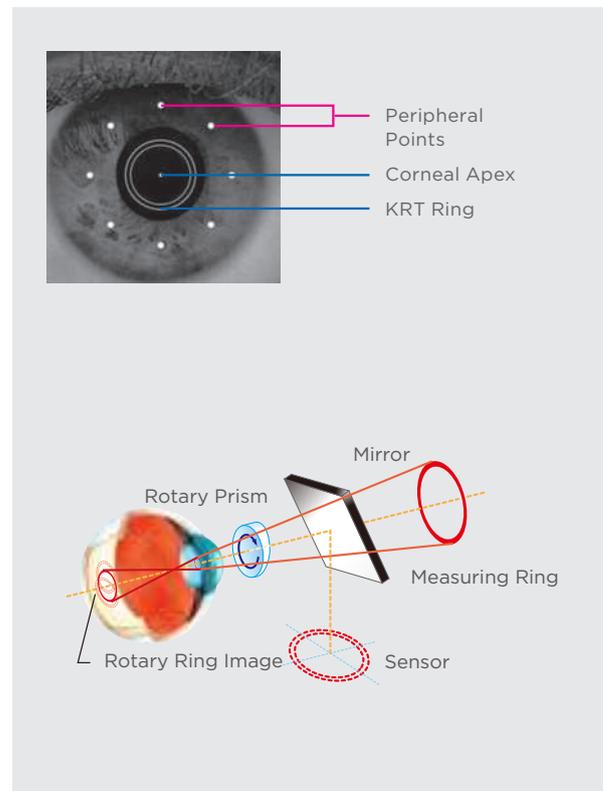

Topcon's Rotary Prism Measuring System

With Topcon's Rotary Prism Technology, the KR-1/RM-1 provides stable measurement. The unique, eccentric rotation of the measurement ring, is designed to reduce the artifact from the fundus.

System Chart

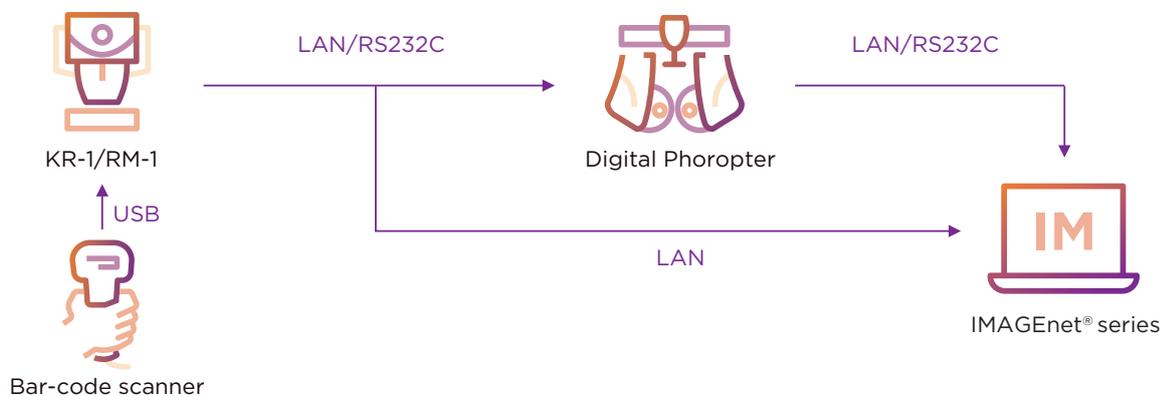

Specification of KR-1/RM-1

Refractive Power Measurement	Spherical refractive power: -25D to +22D (0.12D/0.25D steps)* ¹
	Cylindrical refractive power: 0D to ±10D (0.12D/0.25D steps)* ¹
	Direction of cylindrical axis: 0° to 180° (1°/ 5°steps)
	Measured minimum pupil diameter: φ 2 mm
Corneal Curvature Measurement*²	Corneal curvature radius: 5.00mm to 10.00 mm (0.01mm step)
	Corneal refractive power: 67.50D to 33.75D (0.12D/0.25D steps) (keratometric corneal refractive index = 1.3375)
	Direction of corneal cylindrical axis: 0° to 180°(1°/ 5° steps)
	Corneal cylindrical power: 0D to ±10D (0.12D/0.25D steps)
PD Measurement Range	20mm to 85mm (1mm step)
Data Transport Terminal	USB (Import), RS-232C (Export), LAN (Export)
Dimensions	286-326mm (W) × 445-526mm (D) × 466-615 mm (H)
Weight	19kg
Power Supply	100-240V AC, 50-60Hz, 75VA

*1 $-25D \leq \text{spherical refractive power} + \text{cylindrical refractive power}$ and $\text{spherical refractive power} + \text{cylindrical refractive power} \leq +22D$

*2 The function is not available for RM-1.

IMPORTANT In order to obtain the best results with this instrument, please be sure to review all user instructions prior to operation.
Not all products, services, or offers are available in all markets. Contact your local distributor for country-specific information and availability.

TOPCON INSTRUMENTS (MALAYSIA) SDN. BHD.
(Regional Office for Topcon Healthcare SEA)
Unit 2, 4, Jalan Pensyarah UI/28, Hicom-glenmarie Industrial Park,
40150 Shah Alam, Selangor, MALAYSIA
Phone: +603-766 16260 Fax: +603-766 16261
Email : mys_tim_marketing_sm@topcon.com
www.topconhealthcaresea.com

TOPCON SINGAPORE MEDICAL PTE. LTD.
100G Pasir Panjang Road, #02-18, Interlocal Centre,
SINGAPORE 118523
Phone: +65-68720606 Fax: +65-67736150
E-mail: med.sales.sg@topcon.com
www.topconhealthcaresea.com

TOPCON INSTRUMENTS (THAILAND) CO., LTD.
77/162 Sinnsathorn Tower, 37th Floor, Krungthoburi Rd.,
Klongtongnai, Klongsarn, Bangkok 10600, THAILAND
Phone : +66-02-440-1152 Fax : +66-02-440-1158
Email : tha_medical@topcon.com
www.topconhealthcaresea.com

MEHRA EYTECH PRIVATE LIMITED
801 B Wing, Lotus Corporate Park, Graham Firth Steel Compound
Goregaon (East) Mumbai 400063 Maharashtra, INDIA
Phone: +91-22-61285455
E-mail: sales@mehraeyetech.in
www.topconhealthcare.in

TOPCON (BEIJING) MEDICAL TECHNOLOGY CO., LTD.
Room 2808, Tower C, JinChangAn Building, No.82, Middle Section of
East 4th Ring Road, Chaoyang District, Beijing 100124, P.R. CHINA
Phone: +86-10-8794-5176
E-mail: cn_marketing@topcon.com
www.topcon-china.net/

TOPCON KOREA MEDICAL CO., LTD.
2F YK Building, 205, Dogok-ro, Gangnam-gu,
Seoul, Republic of Korea
Phone :+82-2-6959-7947
E-mail:tkm@topcon.com
www.topconhealthcare.kr/



TOPCON CORPORATION
75-1 Hasunuma-cho, Itabashi-ku, Tokyo 174-8580, JAPAN.
Phone: +81-(0)3-3558-2522/2502
Fax: +81-(0)3-3965-6898
www.topconhealthcare.jp

